




Designed for Video Editing and Content Creation Professionals

PRO Xa

Expansion Chassis for Dulce Fibre Channel Family of Storage Arrays.



- Dulce Fibre Channel Expansion made easy.
- Expand your Dulce Fibre Channel storage arrays without the need of extra Fibre Channel Ports.
- No loss in performance with Fiber Channel Expansion.
- Expansion from chassis to chassis made easy with a mini SAS connection.
- Add more storage to your RAID 0, 1, 5 or 6 system.
- Multiple real-time streams.
- Web-based GUI RAID Console management.
- Mac, PC, Linux Compatible.
- SAN Ready for shared storage environment.
- Instant Ready, no long format required.
- 1 or 2 removable high-performance Expansion Controllers.
- 3Gb or 6Gb SATA or SAS drive compatible.

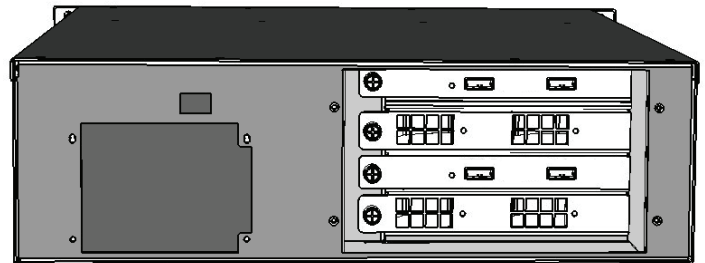

Shown with front bezel in place.

- 3u rackmount - 16 hot swappable drive bays.
- 5 Year Warranty - Industry's longest.

www.dulcesystems.com 818-435-6007 sales@dulcesystems.com



Dulce Systems is pleased to provide to the innovative artists more freedom to make creative decisions on time and on budget. Dulce Systems is the ideal storage provider for independent artists and full-service post houses alike.




Designed for Video Editing and Content Creation Professionals

SPECIFICATIONS


PRO Xa Fibre Channel Expansion Chassis	
Model (RAID 0 capacity) SATA drives, SAS drives optional.	PRO Xa-8 (8TB), PRO Xa-16 (16TB), PRO Xa-32 (32TB) - SATA Capacities PRO Xa-7 (7.2TB), PRO Xa-9 (9.6TB) - SAS Capacities
Disk Drives (3.5")	16 hot swappable SATA/SAS 3Gb/6Gb, 7200/15000 RPM
Interface	Expansion using Mini SAS (2 Connectors, 1 In and 1 Out) Can be ordered with 1 or 2 Expansion Controllers
Electrical	95V–265V, 47-63HZ, auto range.
Current	Idle: 150W, Read/Write: 300W, Max: 450W.
Physical	3u 19" rackmount.
Dimensions	23 x 17.5 x 5.25 L" x W" x H"
Weight	65 lbs installed, 86 lbs shipping.
Environmental	Operating 41 to 104F (5 to 40 C) Non-operating -40 to 158 F (-40 to 70 C)
Humidity (Relative)	Operating 5 to 80% Non-condensing Non-operating 5 to 95% Non-condensing
Warranty	5 Years
Accessories	2 Mini SAS Cables (1 Meter), 2 Meter optional, Power cord, User's Manual.
Appearance	Glossy Titanium look

System Requirements:


Dulce Fibre Channel Array installed on the host computer.
Apple Power Mac G5, Mac Pro.
Windows-based compatible PC.
Linux / Unix.

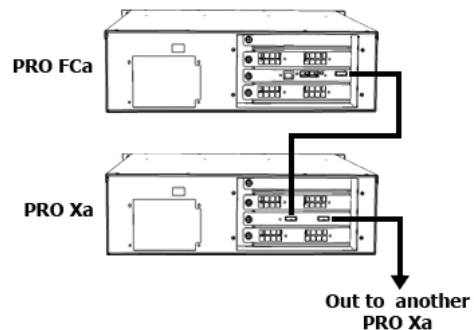

PRO FCa Expansion Option 1 with the PRO Xa

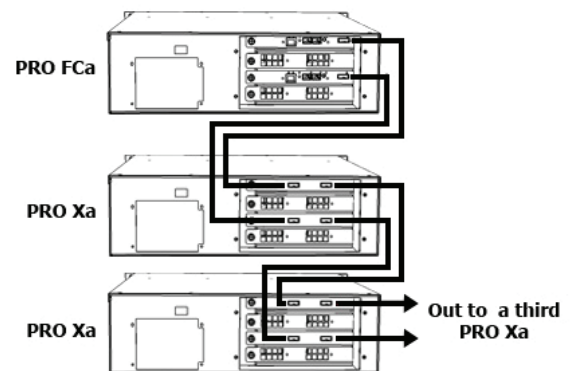

PRO FCa Expansion Option 3 with the PRO Xa

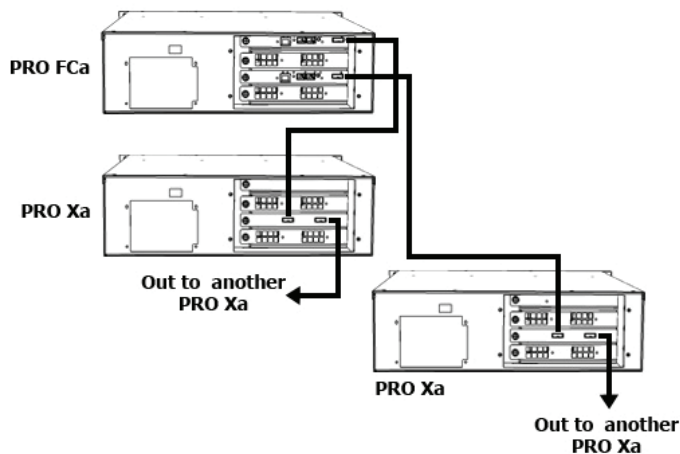

PRO FCa Expansion Option 2 with the PRO Xa