




Designed for Video Editing and Content Creation Professionals

PRO Qxc

Over 415 MB/s RAID 0

Over 340 MB/s RAID 5

FAST PCIe RAID

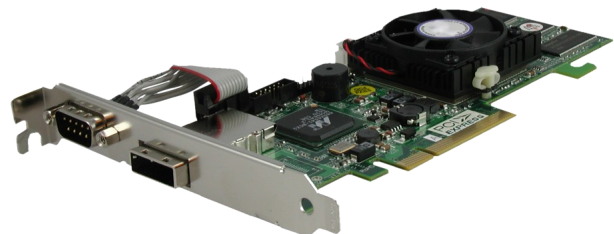

Features:

- **PCIe RAID Controller**
- **All Metal Drive Trays**
- **1 or 2 Meter Cables**
- **Tower Footprint**
- **RAID 0, 1, 3, 5 and JBOD**

RAID Protection. The fast PRO Qxc four drive disk storage array with enhanced RAID controller supports all the latest RAID capabilities to protect your projects and creative contents. RAID protected guards against any single drive failures, keeps working should a drive ever fail.

Fast PCIe Interface. The fastest in its class - the PRO Qxc implements a reliable PCI-express RAID Controller technology for desktop computers. The PCIe RAID Controller is installed in the host computer for a cost reduced option over the PRO Q. The PRO Qxc still offers the same high performance and redundancy of the PRO Q.

www.dulcesystems.com

818-435-6007



Dulce Systems is pleased to provide to the innovative artists more freedom to make creative decisions on time and on budget. Dulce Systems is the ideal storage provider for independent artists and full-service post houses alike.

PRO Qxc	
Model (Capacity GB)	PRO Qxc 2000, 4000, 8000
Disk Drives (3.5")	4 hot swappable 3Gb SATA.
Interface	PCIe RAID Controller.
RAID Level	Hardware RAID 0,1,3,5,JBOD, hot spares. Auto insert/remove detection. Instant availability/ background initialization. >2TB support.
Memory	256MB ECC.
Real-time Playback*	RAID 0: 1 HD, 9 ProRes, 11 DVCPRO HD, 8 SD, 1 2K Film. RAID 5: 1 HD, 7 ProRes, 8 DVCPRO HD, 4 SD, 1 2K Film.
Data Rate*	RAID 0: 400+ MB/s, RAID 5: 340+ MB/s.
Compatibility	Mac OS X, Windows XP/Server/Vista, Linux. AJA, Blackmagic, and other popular capture cards.
Plug and Play	Pre-formatted for OS X. Mounts on desktop on 1st hookup.
Electrical	95V–265V, 47-63HZ, auto range.
Current	Idle: 35W, Read/Write: 60W, Max: 100W.
Physical	Mini Tower.
Dimensions L" x W" x H"	11 x 5.75 x 9.25
Weight (lbs)	20 installed.
Environmental	Operating 41 to 104F (5 to 40 C) Non-operating -40 to 158 F (-40 to 70 C)
Humidity Relative	Operating 5 to 80% Non-condensing, Non-operating 5 to 95% Non-condensing.
Warranty	3 year.
Accessories	PCIe RAID Controller, 1-meter cable (optional 2 Meter cable), Power cord, Installation & User's Manual.
Appearance	Painted Aluminum finish.

* Number will vary using smaller disk drives. Rate at 95% full about 170-180MB/sec RAID 5, 240-250MB/sec RAID 0.

System Requirements:

Apple Mac Pro - One available PCIe x8 slot.
Apple Power Mac G5 (later model with PCIe slots) - One available PCIe x8 slot.
Apple Mac Book Pro or Windows laptop - Available ExpressCard 34 slot.
Windows-based compatible PC with one PCIe x8 slot.
Apple OS X 10.4 or higher. Microsoft Windows XP, Vista, Server. Linux/Unix.

Features:

- Mac, Windows & Linux Compatible.
- Final Cut Studio, Premiere and other popular editor certified.
- ProRes 422, DV, DVCPRO HD, uncompressed SD/HD, 2K Film formats.
- Multiple real-time streams.
- RAID 3 or 5 protection against drive failures.
- PCIe RAID controller installed in host system for cost reduction.
- Four high performance 3Gb/s SATA disk drives.
- GUI RAID Console management and e-mail event notification.
- Enclosure management.
- Quiet and effective cooling fans.
- Expandable with Dulce's PRO EX.

